

Hall sensor FN08 series



Feature description

- The detection distance is determined by the magnetic strength of the target
- Long life and high reliability
- Yellow LED display can check the status of the sensor
- Economical and simple operation
- Protection class IP67 (IEC)


Model specification

NPN NO	FN08DNO-E1	PNP NO	FN08DPO-E1
NPN NC	FN08DNC-E1	PNP NC	FN08DPC-E1

Specifications

Detection distance	8mm	Consumption current	≤15mA
Installation type	Flush	Ambient temperature	-25...70°C
Supply voltage	10...30 VDC	Environment humidity	35...95RH%
Switch point offset	≤±10%	Switching frequency	200Hz
Hysteresis range	3...20%	Withstand voltage	1000/AC 50/60Hz 60s
Repetitive error	≤3%	Insulation resistance	≥50MΩ (500VDC)
Load current	≤50mA	Vibration resistant	Complex amplitude 1.5mm 10...50Hz
Residual voltage	≤2.5VDC		(2 hours each in X, Y, and Z directions)
Circuit protection	surge protection、Short circuit protection、overload protection、reverse polarity protection	Protection degree	IP67
Indicator	Yellow LED	Dimension	M8*1*40
		Housing material	Stainless steel/Nickel copper alloy
		Connection type	M8 Connector

Dimension

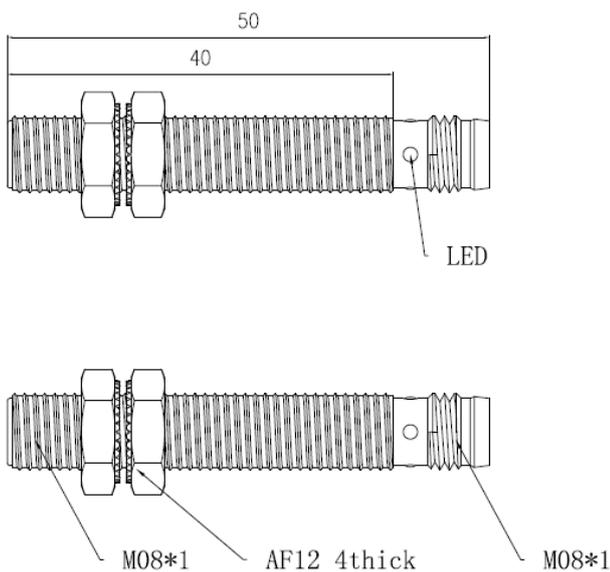

Wiring diagram

