

Plastic cylindrical shape capacitive sensors **CQ34S** series



Features

- ◆ Be able to detect both metal and nonmetal objects;
- ◆ Be able to detect various media via nonmetallic container;
- ◆ Reliable liquid level detecting;




Part number

AC2 wires NO	CQ34SCF15ATO	CQ34SCN20ATO	AC2 wires NC	CQ34SCF15ATC	CQ34SCN20ATC
--------------	--------------	--------------	--------------	--------------	--------------

Technical specifications

Mounting	Flush	Non-flush	Leakage current [I <sub>r</sub> ]	≤3mA
Rated distance [S <sub>n</sub> ]	15mm (adjustable)	20mm (adjustable)	Circuit protection	... ..
Assured distance [S <sub>a</sub> ]	0...12mm	0...16mm	Output indicator	Yellow LED
Dimensions	Φ34*80mm		Ambient temperature	-25℃...70℃
Output	NO/NC(depends on part number)		Ambient humidity	35-95%RH
Supply voltage	20...250 VAC		Switching frequency [F]	15 Hz
Standard target	Fe45*45*1t	Fe60*60*1t	Voltage withstand	2000V/AC 50/60Hz 60S
Switch-point drifts [%/Sr]	≤±20%		Insulation resistance	≥50MΩ (500VDC)
Hysteresis range [%/Sr]	3...20%		Vibration resistance	10...50Hz (1.5mm)
Repeat accuracy [R]	≤3%		Degree of protection	IP67
Load current	≤300mA		Housing material	PBT
Residual voltage	≤10V		Connection type	2m PVC cable

Dimensions

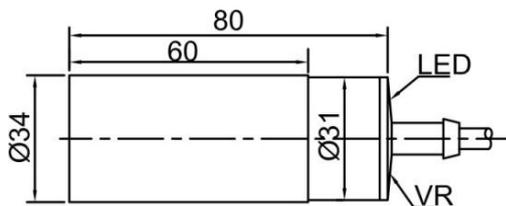

Wiring diagram

