

Metal cylindrical shape photoelectric sensors **PR18** series



Features

- ◆Through beam reflection working principle;
- ◆Excellent anti-interference performance
- ◆High detection accuracy




Part number

NPN NO	PR18-DM3DNO	PNP NO	PR18-DM3DPO
NPN NC	PR18-DM3DNC	PNP NC	PR18-DM3DPC
NPN NO+NC	PR18-DM3DNR	PNP NO+NC	PR18-DM3DPR

Technical specifications

Detection type	Retro reflection	Consumption current	≤25mA
Rated distance [Sn]	3m (non-adjustable)	Circuit protection	Short-circuit, overload and reverse polarity
Standard target	TD-09 reflector	Response time	< 8.2ms
Light source	Infrared LED (880nm)	Output indicator	Yellow LED
Dimensions	M18*53.5mm	Ambient temperature	-15°C...+55°C
Output	NO/NC (depends on part No.)	Ambient humidity	35-85%RH (non-condensing)
Supply voltage	10...30 VDC	Voltage withstand	1000V/AC 50/60Hz 60s
Target	Opaque object	Insulation resistance	≥50MΩ(500VDC)
Hysteresis range [%/Sr]	Vibration resistance	10...50Hz (0.5mm)
Repeat accuracy [R]	≤5%	Degree of protection	IP67
Load current	≤200mA	Housing material	Nickel-copper alloy
Residual voltage	≤2.5V	Connection type	2m PVC cable

Dimensions

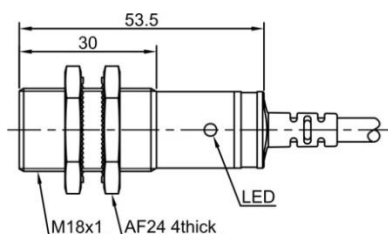

Wiring diagram

