

Metal cylindrical shape capacitive sensors **CQ20** series



Features


- ◆ Be able to detect both metal and nonmetal objects;
- ◆ Be able to detect various media via nonmetallic container;
- ◆ Reliable liquid level detecting;



Part number				
NPN NO	CQ20CF10DNO	PNP NO	CQ20CF10DPO	
NPN NC	CQ20CF10DNC	PNP NC	CQ20CF10DPC	
NPN NO+NC	CQ20CF10DNR	PNP NO+NC	CQ20CF10DPR	

Technical specifications			
Mounting	Flush	Consumption current	≤15mA
Rated distance [Sn]	10mm (adjustable)	Circuit protection	Short-circuit, overload and reverse polarity
Assured distance [Sa]	0...8mm	Output indicator	Yellow LED
Dimensions	Φ20*80mm	Ambient temperature	-25℃...70℃
Output	NO/NC(depends on part number)	Ambient humidity	35-95%RH
Supply voltage	10...30 VDC	Switching frequency [F]	50 Hz
Standard target	Fe30*30*1t	Voltage withstand	1000V/AC 50/60Hz 60S
Switch-point drifts [%/Sr]	≤±20%	Insulation resistance	≥50MΩ (500VDC)
Hysteresis range [%/Sr]	3...20%	Vibration resistance	10...50Hz (1.5mm)
Repeat accuracy [R]	≤3%	Degree of protection	IP67
Load current	≤200mA	Housing material	Nick-copper alloy
Residual voltage	≤2.5V	Connection type	2m PVC cable

Dimensions

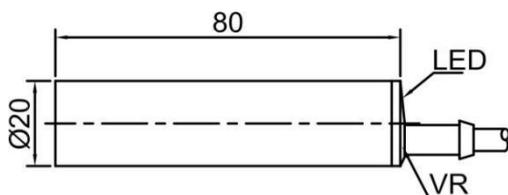

Wiring diagram

