

Metal cylindrical shape capacitive sensors **CQ32**series


Features

- ◆ Be able to detect both metal and nonmetal objects;
- ◆ Be able to detect various media via nonmetallic container;
- ◆ Reliable liquid level detecting;



Part number


AC2 wires NO CQ32CF15ATO

AC2 wires NC CQ32CF15ATC

Technical specifications

Mounting	Flush	Leakage current [I _r]	≤3mA
Rated distance [S _n]	15mm (adjustable)	Circuit protection
Assured distance [S _a]	0...12mm	Output indicator	Yellow LED
Dimensions	Φ32*80mm	Ambient temperature	-25℃...70℃
Output	NO/NC(depends on part number)	Ambient humidity	35-95%RH
Supply voltage	20...250 VAC	Switching frequency [F]	15 Hz
Standard target	Fe45*45*1t	Voltage withstand	2000V/AC 50/60Hz 60S
Switch-point drifts [%/Sr]	≤±20%	Insulation resistance	≥50MΩ (500VDC)
Hysteresis range [%/Sr]	3...20%	Vibration resistance	10...50Hz (1.5mm)
Repeat accuracy [R]	≤3%	Degree of protection	IP67
Load current	≤300mA	Housing material	Nick-copper alloy
Residual voltage	≤10V	Connection type	2m PVC cable

Dimensions

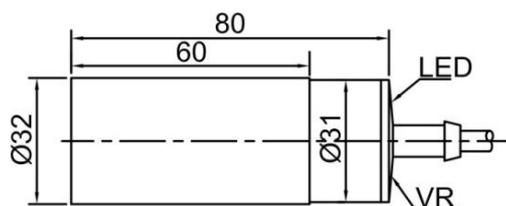

Wiring diagram

